

FAST-Chipboard



Call 01738 840258 to find out more

FAST® Chipboard

The tongue and groove FAST® Chipboard is available in 18mm for separating floor sub-decks or 22mm thickness for finished floor construction.



The base product, EGGER Peel Clean Xtra, is manufactured to the specification of EN312, is regularly audited independently, is FSC chain-of-custody certified and has been independently certified by the BBA (No.08/4585) as a chipboard flooring board capable of providing temporary weather protection prior to completion of the building envelope.

The chipboard has a reactive Hot Melt Polyurethane coating rolled on which when cured forms a FR barrier and creates FAST® Chipboard providing robustness against fire.



FAST® Chipboard has a weather resistant peel clean top surface layer, which results in a product that offers protection from moisture penetration.




FR Build Performance Testing

Is compliant with the STA's guidance which was designed to help clients, designers and CDM co-ordinators consider the risk of fire to neighbouring buildings, should a fire occur in a timber frame building during construction.

For further information go to STA's website at www.sta.com

Technical Information

Length	2400mm
Width	600mm
Thickness	18mm or 22mm
Fixings	Standard EGGER fixing details apply
STA FR Build	Category C compliant
Minimum airborne sound insulation levels for intermediate floors:	<ul style="list-style-type: none">Scotland Section 5.2 = 43 R_wEngland & Wales Approved Document E = 40 R_w FAST® Chipboard on an IWS-Floor = 44 R_w

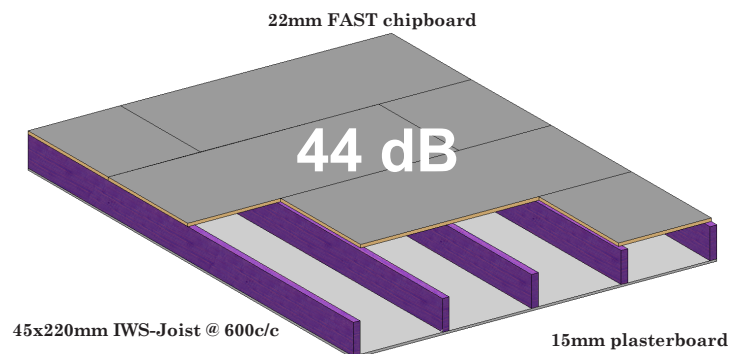

No insulation

No resilient bars

Call: 01738 840258 or e-mail sales@intelligentwoodsystems.com

intelligentwoodsystems.com