

# FAST-Chipboard



Call 01738 840258 to find out more

## FAST® Chipboard

The tongue and groove **FAST® Chipboard** is available in 18mm for separating floor sub-decks or 22mm thickness for finished floor construction.



The base product, EGGER Peel Clean Xtra, is manufactured to the specification of EN312, is regularly audited independently, is FSC chain-of-custody certified and has been independently certified by the BBA (No.08/4585) as a chipboard flooring board capable of providing temporary weather protection prior to completion of the building envelope.

The chipboard has a reactive Hot Melt Polyurethane coating rolled on which when cured forms a FR barrier and creates **FAST® Chipboard** providing robustness against fire.



**FAST® Chipboard** has a weather resistant peel clean top surface layer, which results in a product that offers protection from moisture penetration.




## FR Build Performance Testing

Is compliant with the **STA's** guidance which was designed to help clients, designers and CDM co-ordinators consider the risk of fire to neighbouring buildings, should a fire occur in a timber frame building during construction.

For further information go to STA's website at [www.structuraltimber.co.uk/](http://www.structuraltimber.co.uk/)

## Technical Information

Length	2400mm
Width	600mm
Thickness	18mm or 22mm
Fixings	Standard EGGER fixing details apply
STA FR Build	Category C compliant
Minimum airborne sound insulation levels for intermediate floors:	<ul style="list-style-type: none"> <li>Scotland Section 5.2 = 43 R<sub>w</sub></li> <li>England &amp; Wales Approved Document E = 40 R<sub>w</sub></li> </ul> <p><b>FAST® Chipboard</b> on an IWS-Floor = 44 R<sub>w</sub></p>

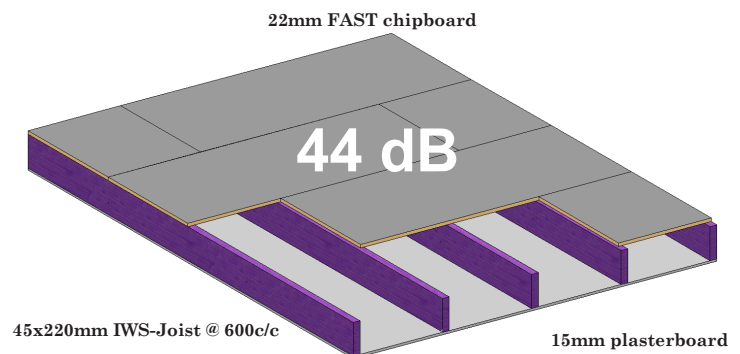

**No insulation**

**No resilient bars**

Call: 01738 840258 or e-mail [sales@intelligentwoodsystems.com](mailto:sales@intelligentwoodsystems.com)

[intelligentwoodsystems.com](http://intelligentwoodsystems.com)